



S18

COUNTERTOP


Expect more with this high-capacity solution that delivers **premium chilled, sparkling, and ambient water on demand.**

This advanced system produces up to 180 liters per hour* of chilled, ambient or sparkling water, perfect for high volume applications including hotels and restaurants.

Featuring an 11" dispense height, rapid cold carbonation, and manual faucets for dependable dispensing, the S18 makes quick, efficient bottle-filling an easy task for any user.

System Highlights:

- 3-tap dispensing features cold, sparkling, and ambient water
- 4-Stage advanced filtration system easily mounts inside the unit for easy installation and service
- Ice bath cooling technology for a high-volume of cold water
- Large capacity drip tray engraved with water type to facilitate accurate bottle positioning

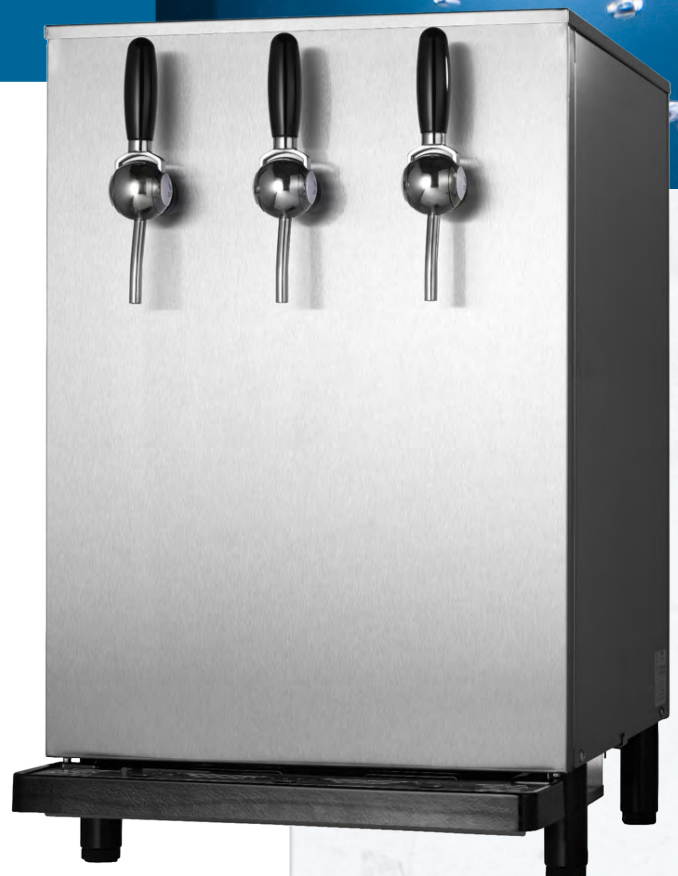

*Capacity dependent on source water temperature

The S18 distinguishes itself as a **high-end system**, offering generous capacity and exceptional quality for both **still and sparkling water**.

Features:

- Unrivaled 22lb ice bank chills a higher volume of cold water
- Dispense height of 11" accommodates large reusable bottles
- Utilizes R290 environmentally friendly natural refrigerant
- Equipped with a 1.7 liter sparkling tank
- Programmable flow meter tracks usage and allows more consistent scheduled service and filter changes
- Heavy duty rotary faucets allow for pressure and flow control to limit splashing
- Easily connects to external CO₂*

*CO₂ regulator is included



| | |
|--|--|
| Height | 27.4 in |
| Width | 22.4 in |
| Depth | 17.1 in |
| Depth with Drip Tray | 23.6 in |
| Rear Ventilation Clearance** | 2 in |
| Dry Weight | 110 lbs |
| Ice Bank | 22 lbs |
| Chilling Capacity | 180 L/hr* |
| Maximum Flow Capacity | 240 L/hr |
| Power Voltage Frequency Running Amps | 115V 60 Hz 7 Amps |
| CO ₂ Specification | Available hookup for external CO ₂ tank or bulk CO ₂ supply. Connected with 1/4" poly tubing to the regulator. Operates at 55 psi. |
| Water Supply / Pressure PSI (Bar) | 3/8" Øly Tubing for water connection 40 psi min – 60 psi max (2.75 – 6.9 bar) |

*Capacity dependent on source water temperature

**Allow clearance on top and left side of dispenser for maintenance



3175 Bass Pro Drive
Grapevine, TX 76051
(800) 288-1891